



**The innovative solution to higher yielding energy rich crops**



**MACHINERY RANGE**



The **SAMCO** pneumatic drills have been in development over **23 years** to provide customers with a consistent quality of sowing even in difficult conditions.

A roller in the front of the drill allows the seed to be sown into a firm seed bed with a constant depth of sowing. This roller is also the drive train for the seeding elements.

Equipped with **Kverneland** seed units, the drill offers a very good quality of sowing regardless the type and size of the seed.

All machines are equipped with the newest and up to date **Geoline** spraying system. Certain aspects of the machine hydraulic system have been interlinked with the in-cab **Geoline** monitors.



MAIZE DRILLS

SEEDER	1
SPRAYER	2
FILM LAYER	3
2200	5
22HD	6
4800	7
4IHD	8
7100	9
7IHD	10
FRONT TANK OPTIONS	11
FERTILISER OPTIONS	13
IN-CAB MONITORS	15

PUNCH MACHINES

FILM LAYER	18
SEEDER	19
PMII40	21
PM2I40	22
PM4I40	23
PM8220	24




# SEEDER

Two mechanical selectors can be adjusted to reduce doubling of smaller seeds on the disc and allow larger seeds to be sown without any changes to the seed placement.

The Seed computer which monitors the number of seeds being sown on each unit is displayed to the operator via the display. Sensors fitted to each seed unit of the machine allow the operator to know when a unit is empty or blocked by sounding an alarm.

Information provided by the computer:

- Seed rate per ha for each seeding unit
- The number of ha per day
- The number of total hectares
- The actual speed per hour
- Area per hour
- The number of hours worked

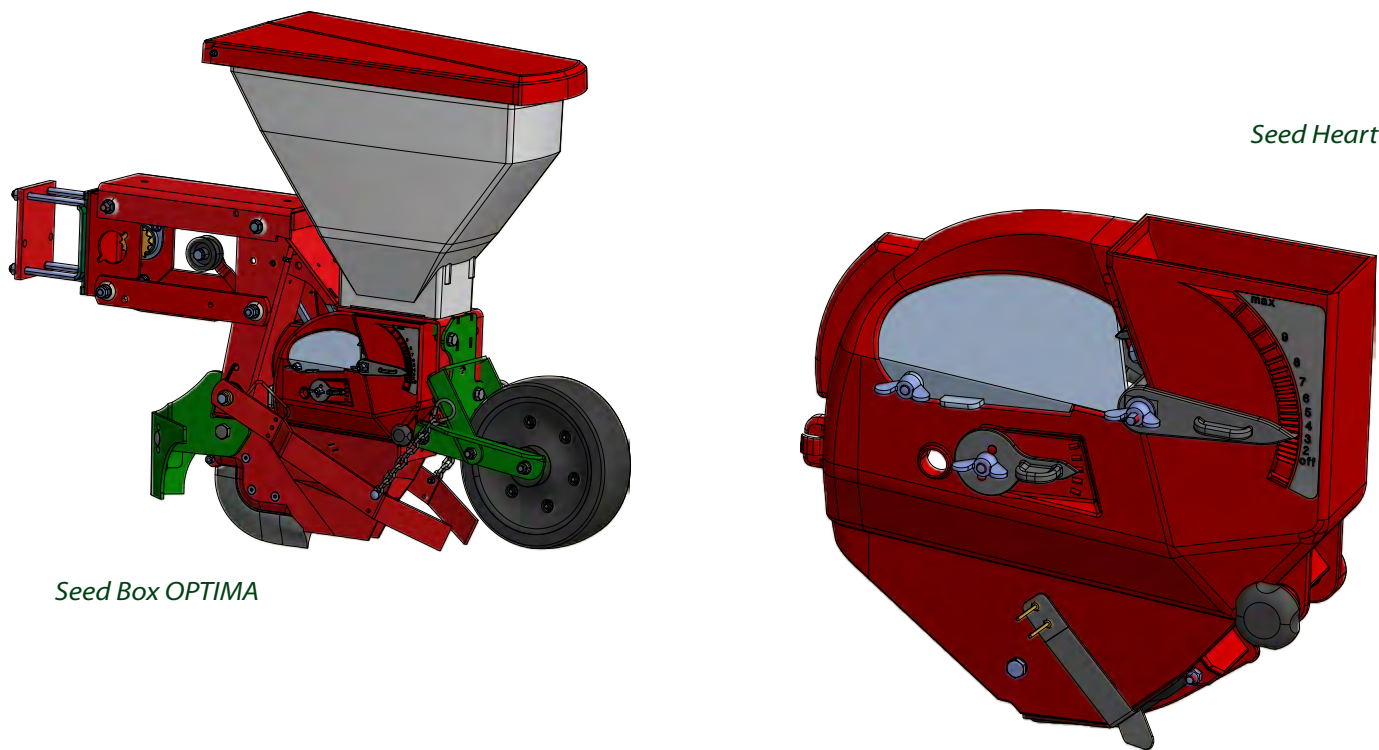

# SPRAYER


All **SAMCO** Drills are equipped with a spray system controlled automatically by a computer located in the cab.

It takes into account the forward working speed to regulate and spray the correct volume per hectare programmed. A progress of 0.2 km / h speed is required to trigger spray. Regulating the volume starts as soon as the forward speed to 3.5 km / h. This is necessary to ensure even application of the volume of herbicide and a good covering of the entire surface to reduce the risk of weed growth.

The **Geoline** monitor is designed to make the simplest possible operation to the operator.

Several functions are managed directly by the computer:

- Management of spray volume
- Management of Ha worked and total daily
- Management of herbicide volume remaining in the front tank

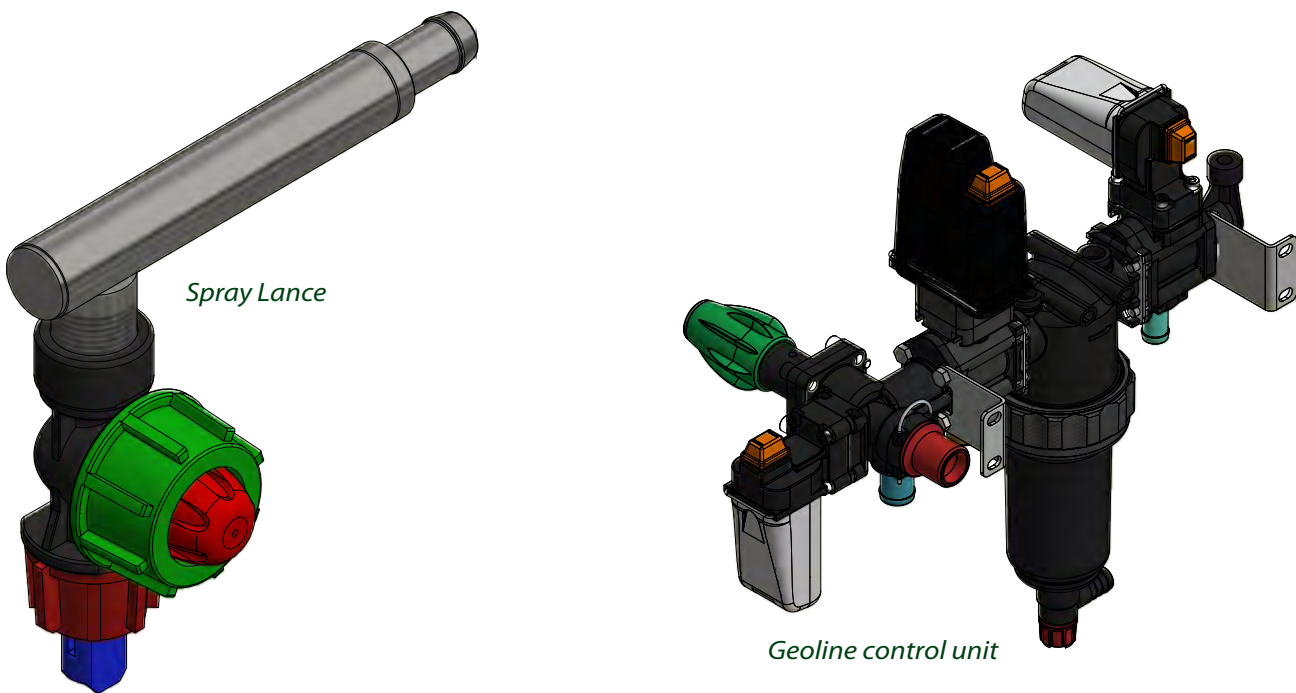




# FILM LAYER

The film metering units on the **SAMCO** machine are designed to lay the film on the soil and to cover the edges securely. This prevents wind damage to the film, even while travelling at high speeds, to maintain daily output. Each roll of film covers two rows of maize corn.

With the “**Easy Roll Loading System**,” it allows the operator to change the rolls of film with ease. Spring loaded roll holder units place the new roll in the correct position.

Spring tensioned wheels allow the film to be fed into position and to maintain this position while working, eliminating the need of the operator to re- adjust the roll during operation.

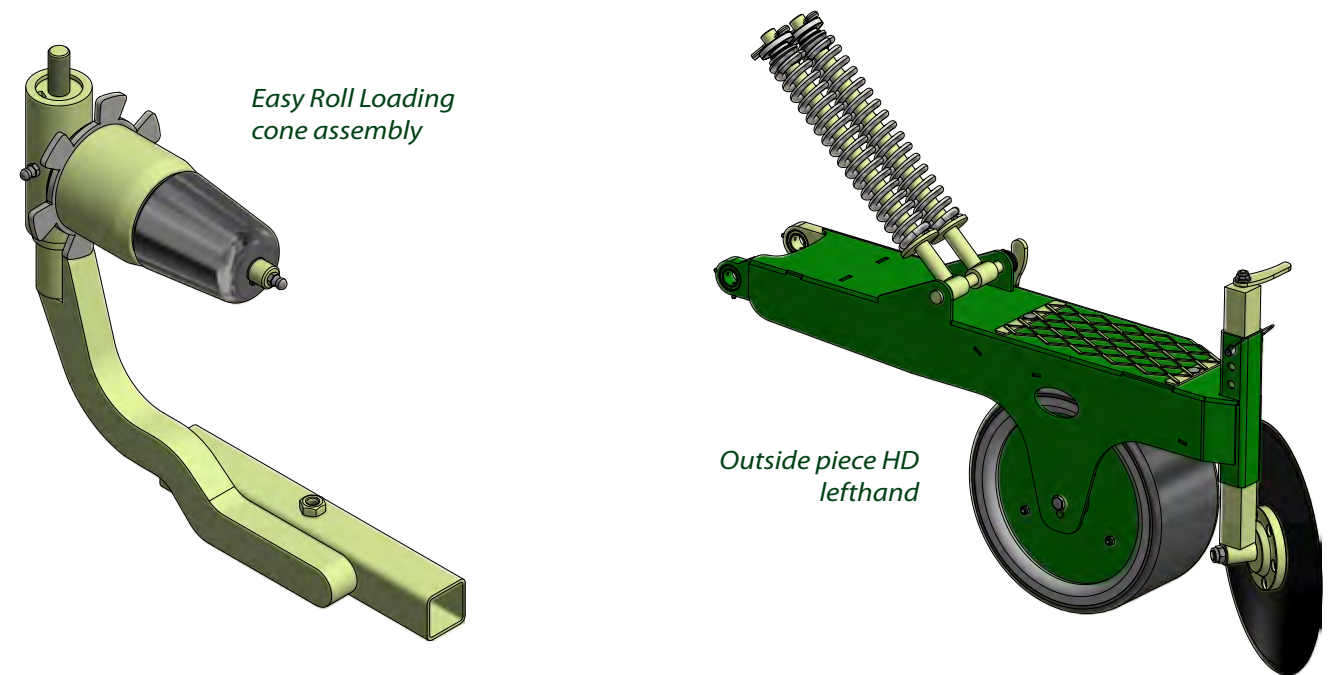





Working width: 1.6 meters  
Weight: 850 kilo  
Sprayer tank capacity: 200 litre  
Tractor HP: >50  
Seed width rows: 80cm

**Options:**  
Granular fertilizer  
Front tank: 600 litre



Working width: 1.6 meters  
Weight: 1,000 kilo  
Sprayer tank capacity: 100 litre  
Tractor HP: >75  
Seed width rows: 80cm

**Options:**  
Granular fertilizer  
Liquid fertilizer  
Front tank: 600 litre

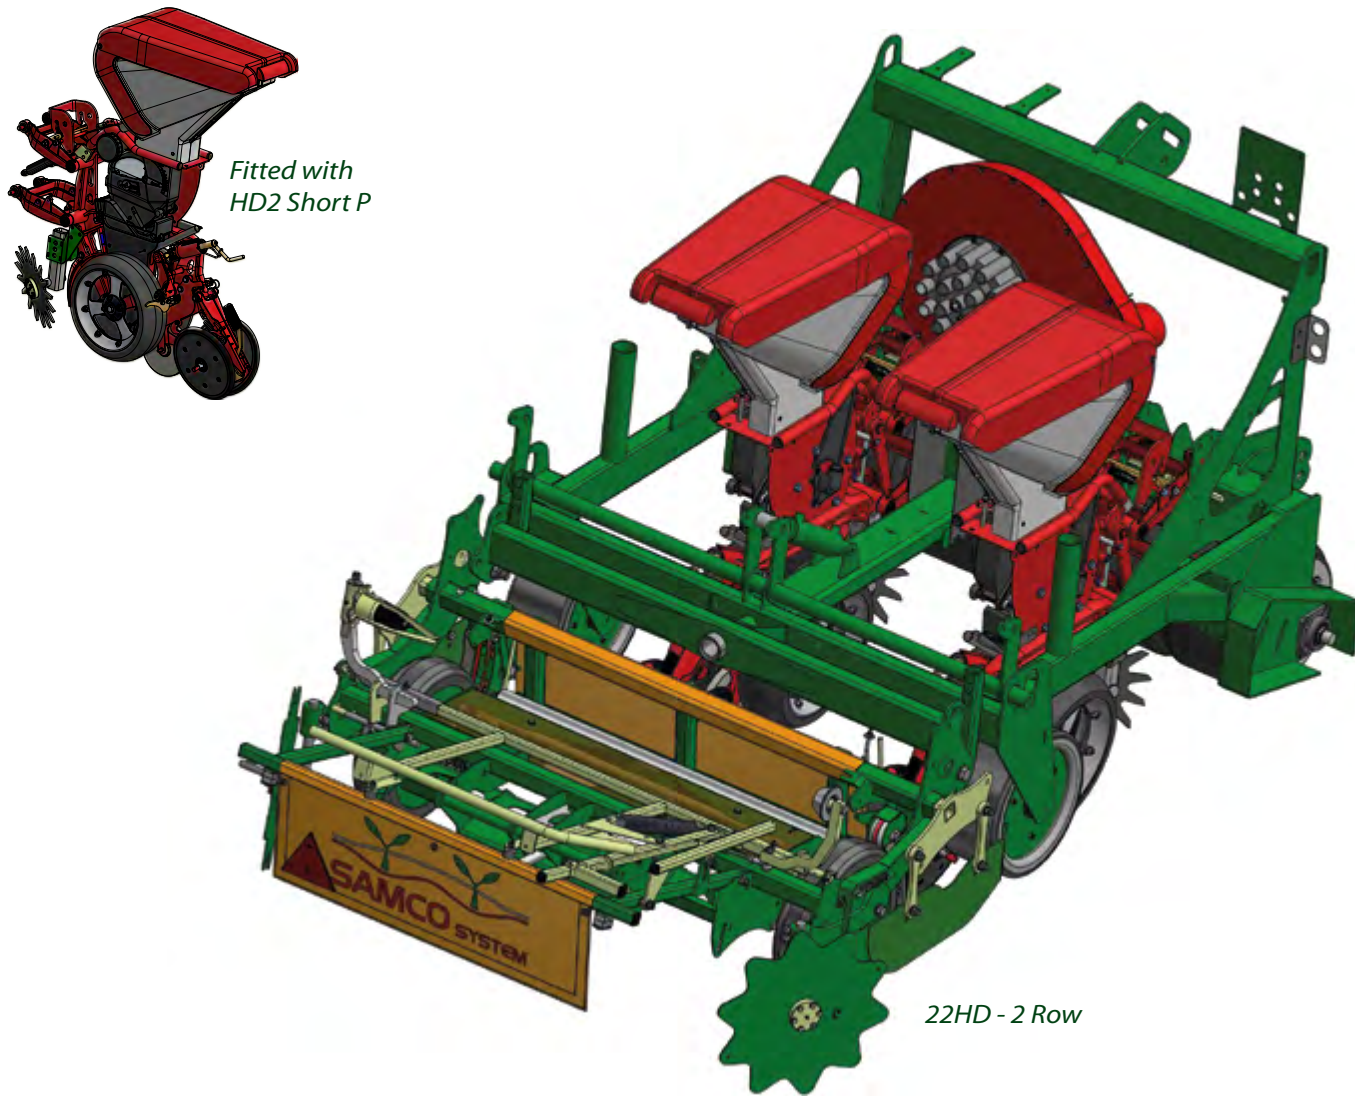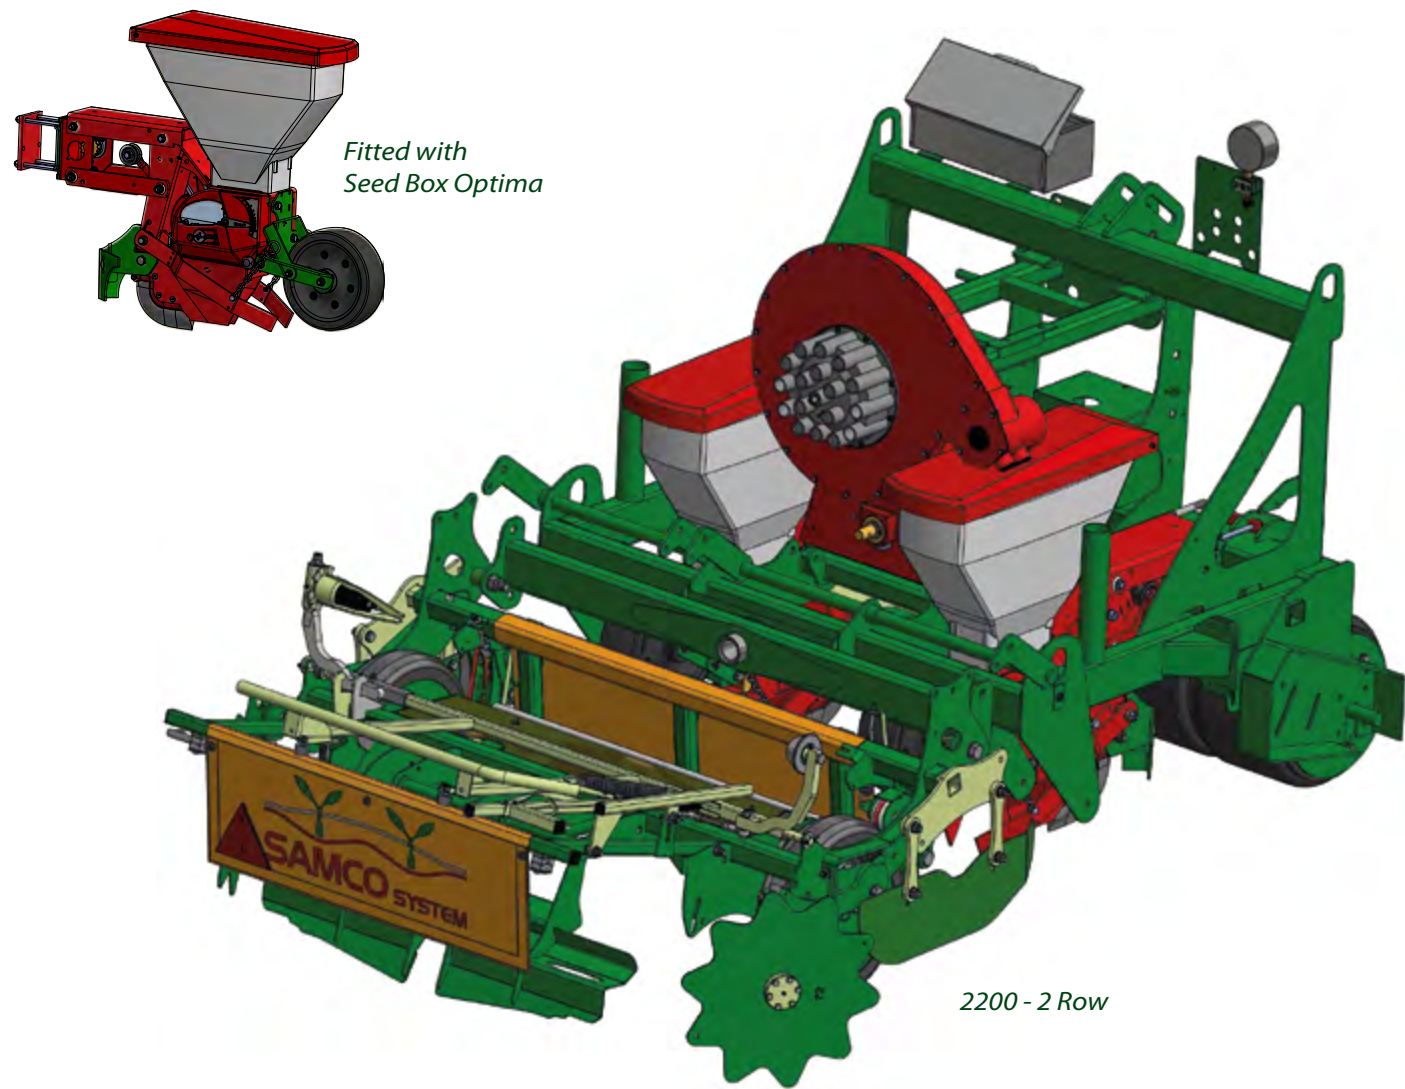



# 4800

Working width: 3.2 meters  
Weight: 2,200 kilo  
Front linkage Sprayer tank capacity: 1,200 litre  
Tractor HP: >130  
Seed width rows: 80cm


- Options:**
- Granular fertilizer
  - Micro granular fertilizer
  - Liquid fertilizer
  - CarryAll compatible




# 41HD

Working width: 3.2 meters  
Weight: 2,200 kilo  
Front linkage Sprayer tank capacity: 1,200 litre  
Tractor HP: >130  
Seed width rows: 80cm

- Options:**
- Granular fertilizer
  - Micro granular fertilizer
  - Liquid fertilizer
  - CarryAll compatible

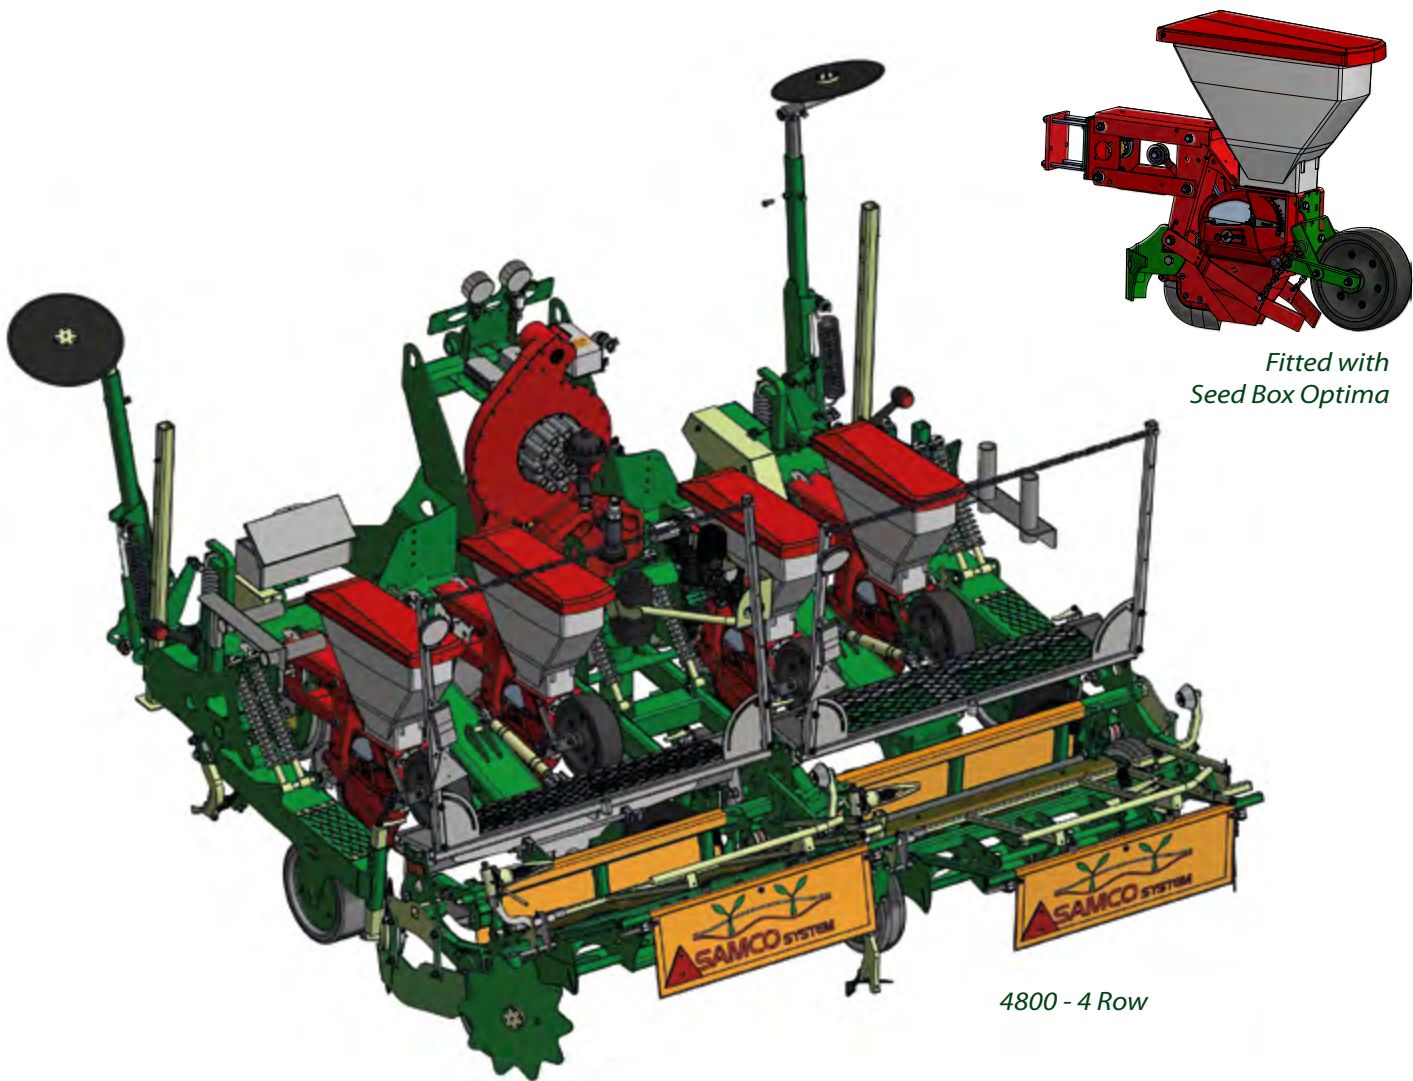

4800 - 4 Row

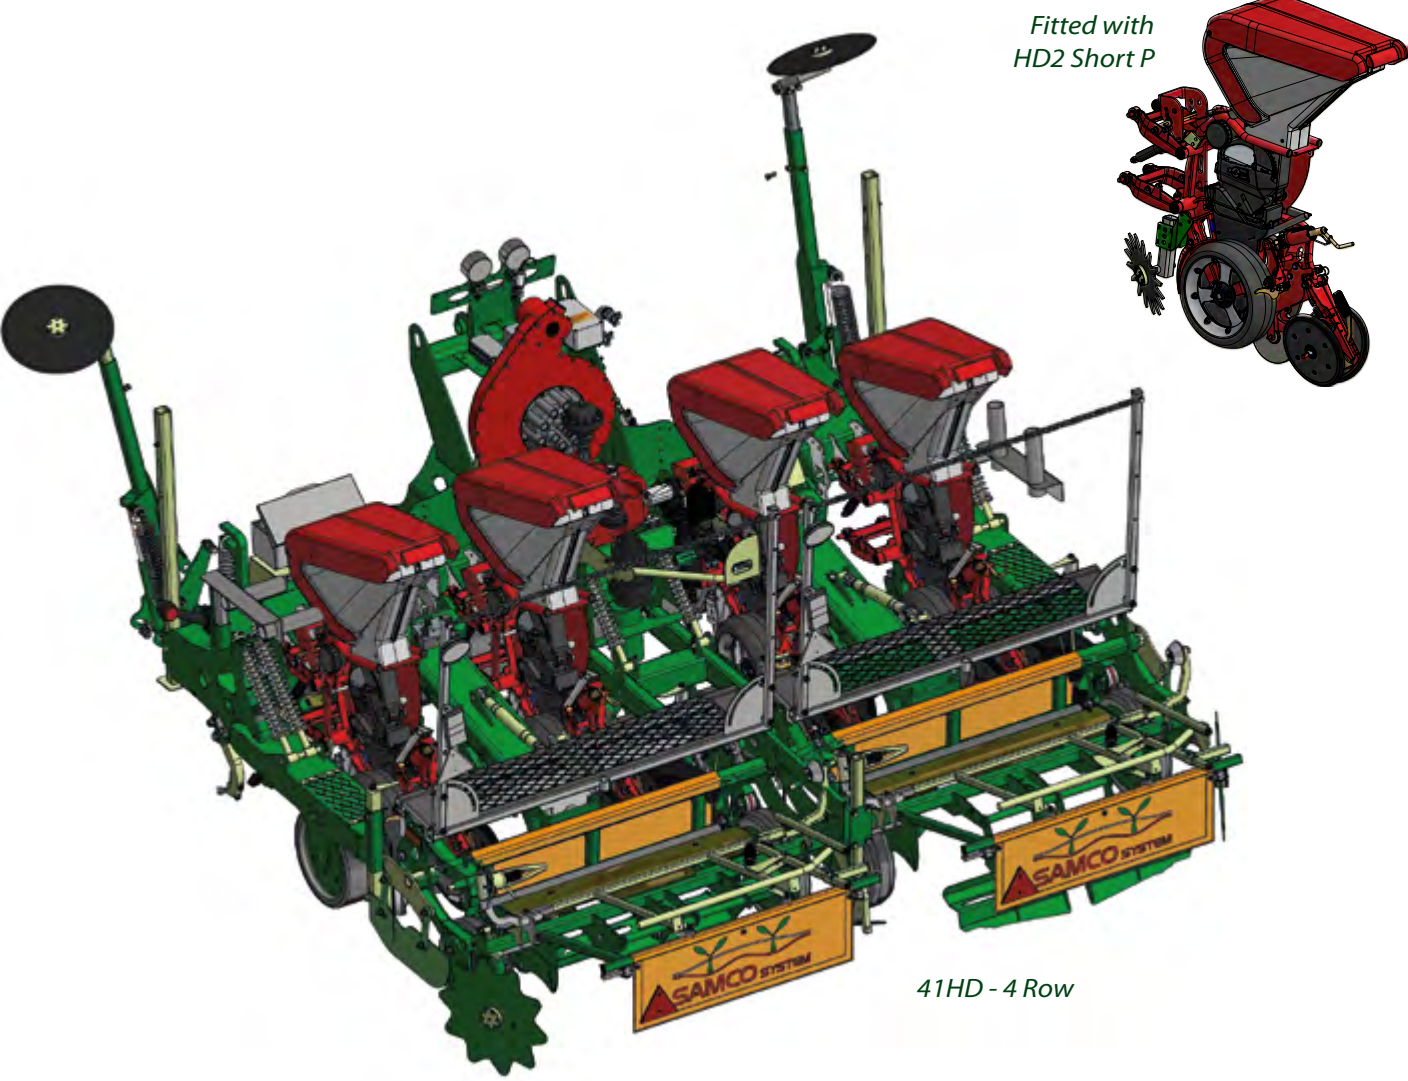

41HD - 4 Row



# 7100

Working width: 4.5 meters / folding 3.2 meters  
Weight: 3,300 kilo  
Front linkage Sprayer tank capacity: 1,200 litre  
Tractor HP: >180  
Seed width rows: 75cm


**Options:**  
Micro granular fertilizer  
CarryAll compatible




# 71HD

Working width: 4.5 meters / folding 3.2 meters  
Weight: 3,600 kilo  
Front linkage Sprayer tank capacity: 1,200 litre  
Tractor HP: >180  
Seed width rows: 75cm

**Options:**  
Micro granular fertilizer  
CarryAll compatible


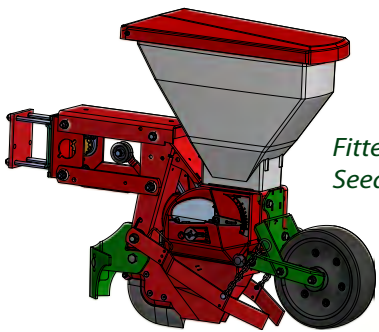


Fitted with  
Seed Box Optima

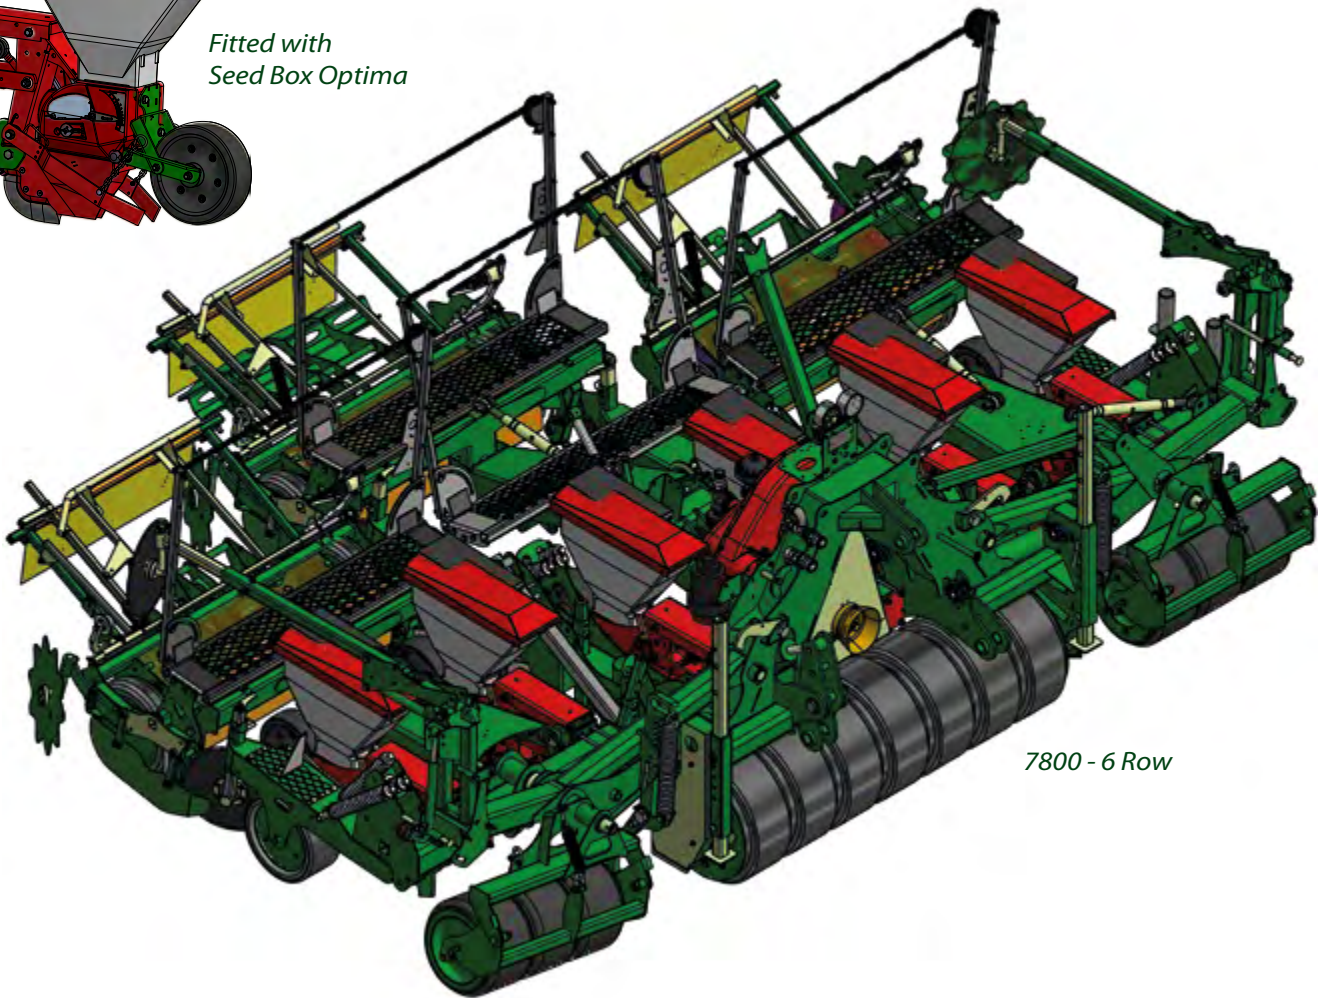

7800 - 6 Row

Fitted with  
HD2 Short P

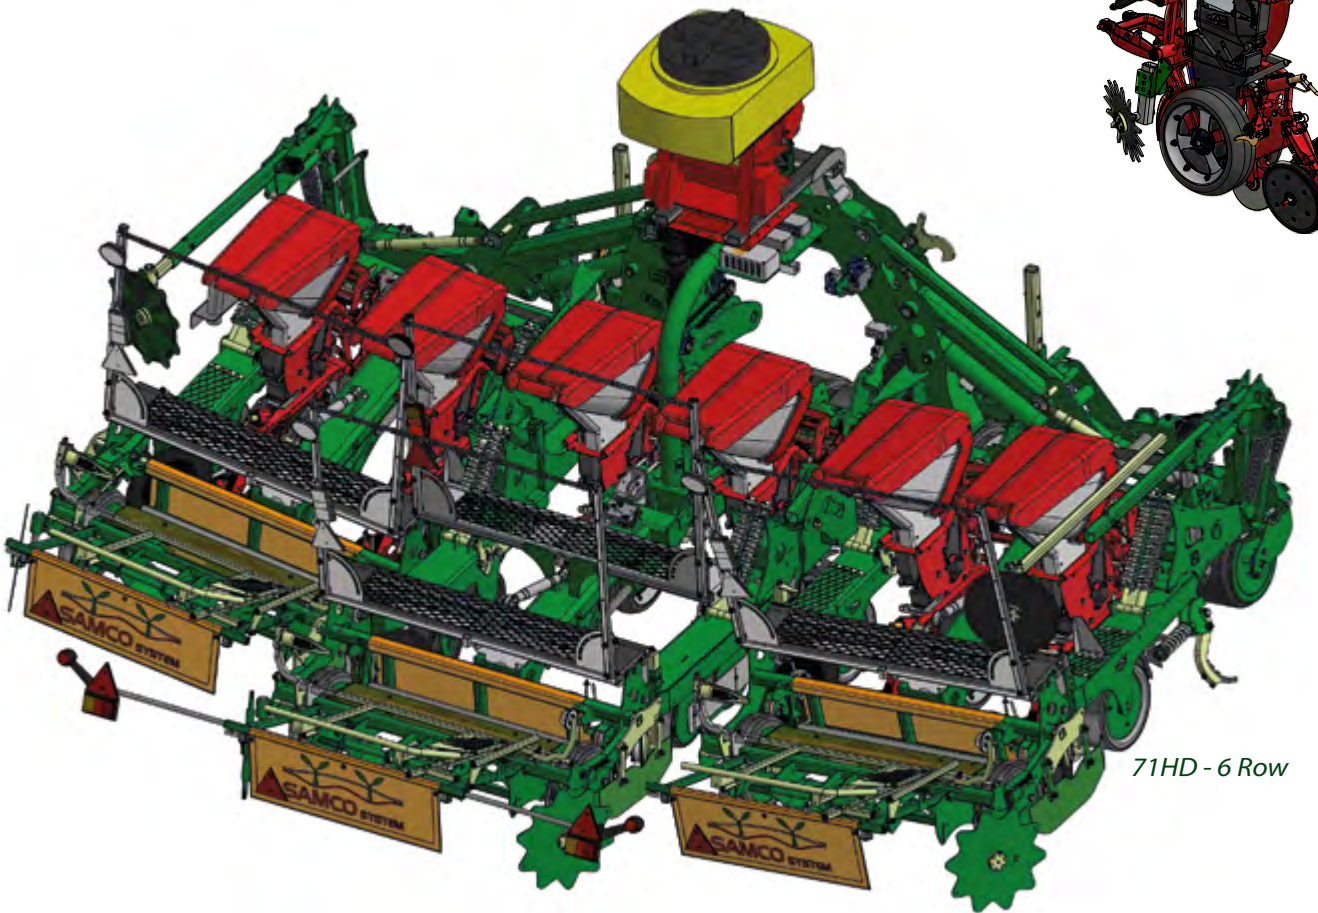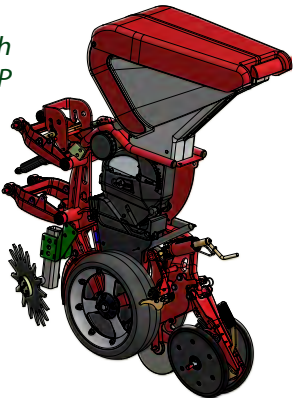

71HD - 6 Row



# FRONT TANK OPTIONS

**Tank options include:**

**Drill mounted**


- 200 Litre mounted tank
- Only available on 2 row machines
- 300 Litre x 2 mounted tank
- Available on 4 row machines for Pre-emergence herbicide or liquid fertilizer option

**Front linkage**


- 1,200 Litre tank - Available 4 & 6 row models
- 120 Litre rinse out tank
  - Hand rinse 15 Litre
  - Mixing pot for adding the herbicide to the front tank
  - A valve for self-filling using the machines P.T.O driven pump
- 2,000 Litre tank - Available 4 & 6 row models
- 200 Litre rinse out tank
  - Hand rinse 15 Litre
  - Mixing pot for adding the herbicide to the front tank
  - A valve for self-filling using the machines P.T.O driven pump

**CarryAll**


- 2,000 Litre & 3,000 Litre Available
- Hand rinse 15 Litre
  - Mixing pot for adding the herbicide to the front tank
  - A valve for self-filling using the machines P.T.O driven pump
  - Optional - Liquid fertiliser tank

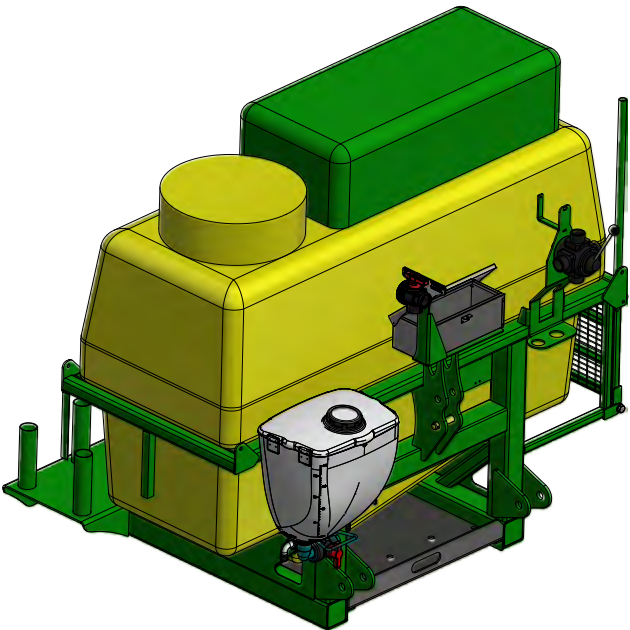

1,200 Litre tank

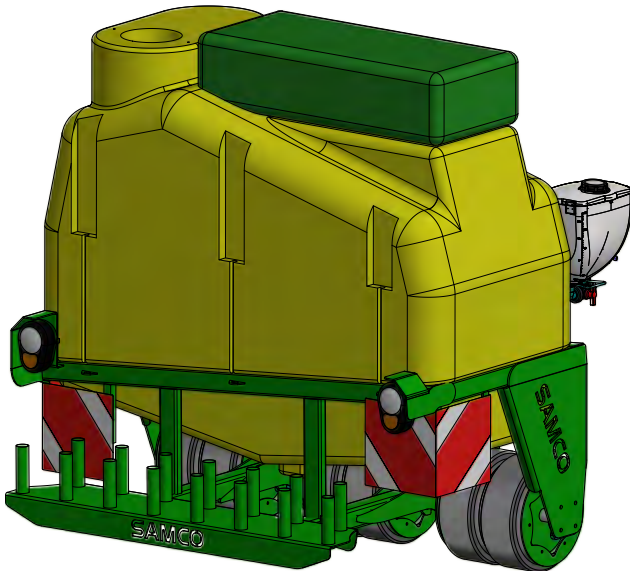

2,000 Litre tank

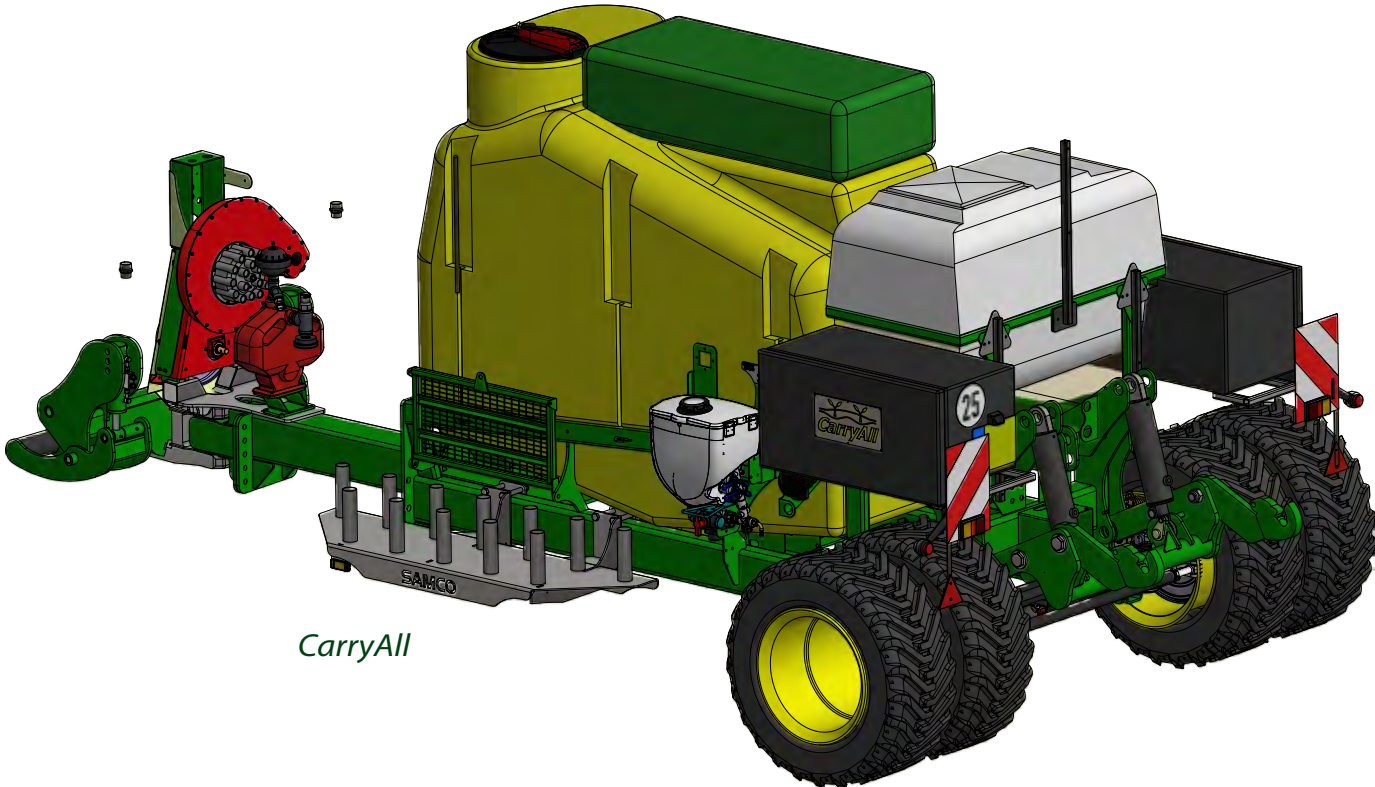

CarryAll



# FERTILISER OPTIONS

## Large Granular

- Available on 2 row, and 4 row models.



## Liquid

- Available on 2 row, 4 row, and 6 row models.

## Micro Granular

- Available on 2 row, 4 row, and 6 row models & Punch model machines.


41HD Machine Assembly  
with Fertiliser Options

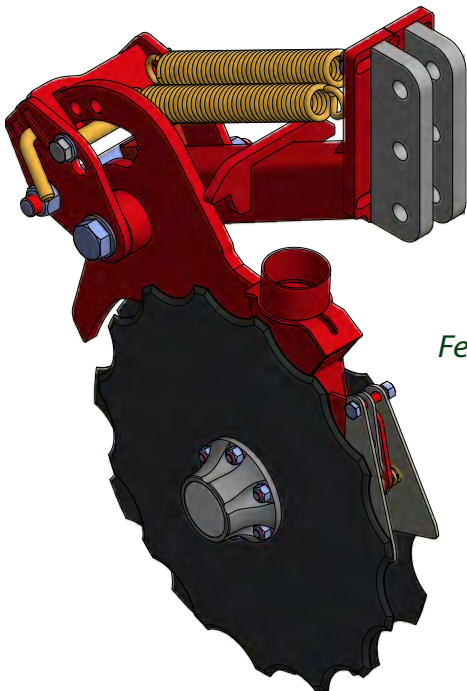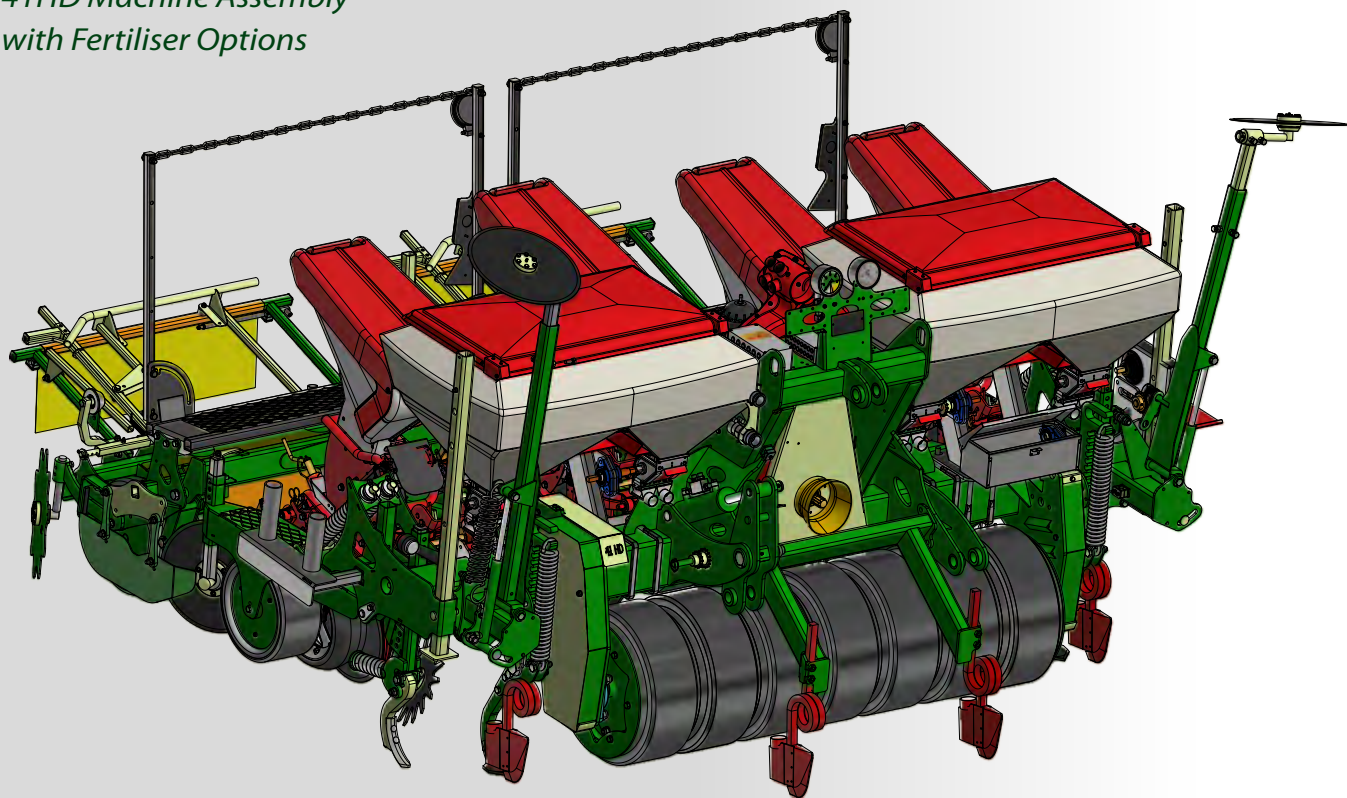

Fertiliser Disc



Fertiliser Leg

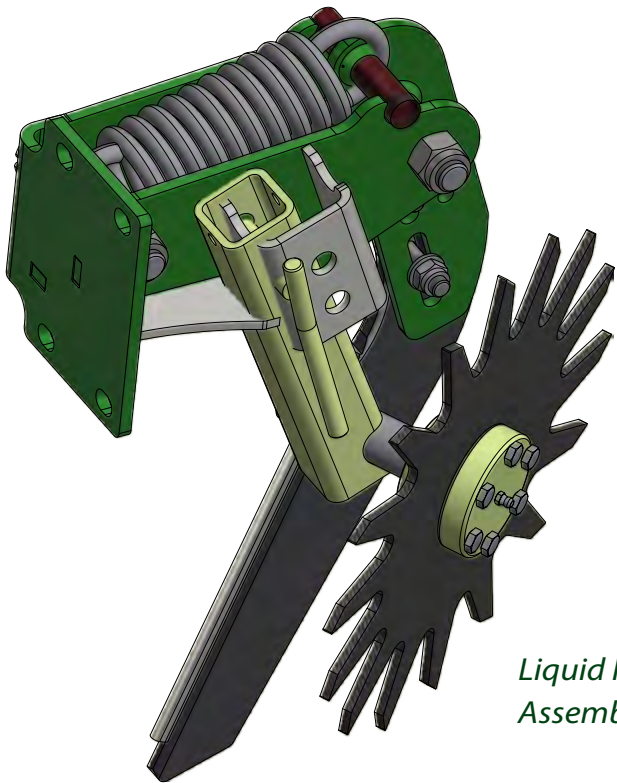

Liquid Fertiliser  
Assembly



# IN-CAB MONITORS

## GeoSystem 260

All machines are equipped with the **Geosystem** monitor for applying herbicide while sowing.

The monitor automatically takes into account the forward speed to regulate spray volume per hectare which is set in the program.

This new monitor has easy touch toggle switches which enables the operator to change settings while working.



## Precimat

**SAMCO** also offers the **Muller Precimat** seed monitor. In the cab computer monitors the number of seeds being sown on each seed box unit which is displayed to the operator via the screen.

Sensors fitted to each seed box units of the machine allows the operator to know when a unit is empty or blocked by sounding an alarm.

The computer also measures the hectares sown and forward speed.








## FILM LAYER

Many different versions of our machine are available in film widths from 1.2 meters to 2.2 meters.


The film metering units on the **SAMCO** machine are designed to lay the film on the soil and to cover the edges securely. This prevents wind damage to the film, even while travelling at high speeds, to maintain daily output.

The “**easy roll through system**” allows the operator slide the roll of film onto the polylayer with ease when changing the rolls.

The machine is suitable for use with **Black Bio Films** for weed control in organic farming and with **Transparent Film** types to increase seed germination at the time of sowing.

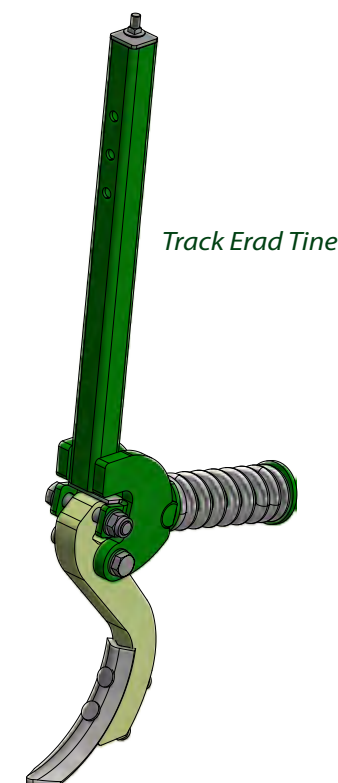

*Track Erad Tine*

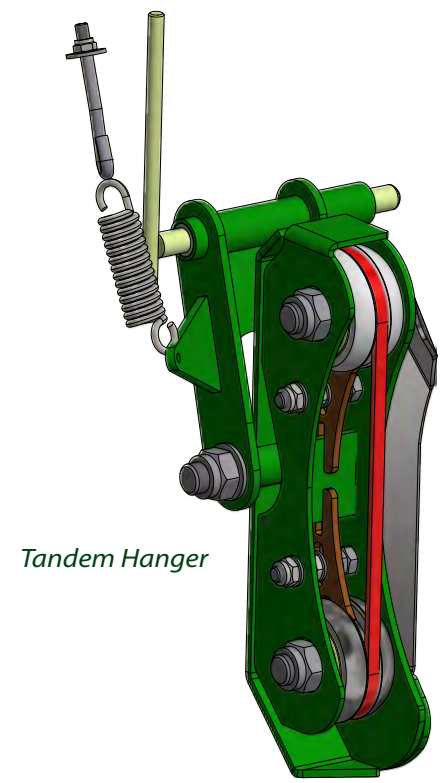

*Tandem Hanger*




# SEEDER

**SAMCO** design many types Punch Seeders to suit every growers' requirements. The Punch Hole units capable of seed row spacing's from 23cms to 75cms and seed spacing's in the row from 10cm to 250cm. Easily adjustable Punch Hole units allow for a wide choice of seed depth settings, meaning that this machine can be used with a comprehensive range of seed types, regardless of soil conditions in a range of agronomic systems.

## Two types of Seed delivery

1. A popular method employed is Air Assisted seed distribution to the Punch Hole units. This allows the user to select the number of seeds sown per punch hole/kg/ha. This is to allow the grower achieve the target germination percentages, or to suit the growing system in place, from 1 to 20 seeds per punch hole. This is achieved by simply choosing the correct cell wheel to match the seed and the desired rate per ha. The speed of seed delivery is matched to the forward speed which means that the system is fully automatic regardless of forward speed variations, and has various functions such as low hoppers level, blockage sensors and can allow the operator to vary the seed rate per ha while on the move.

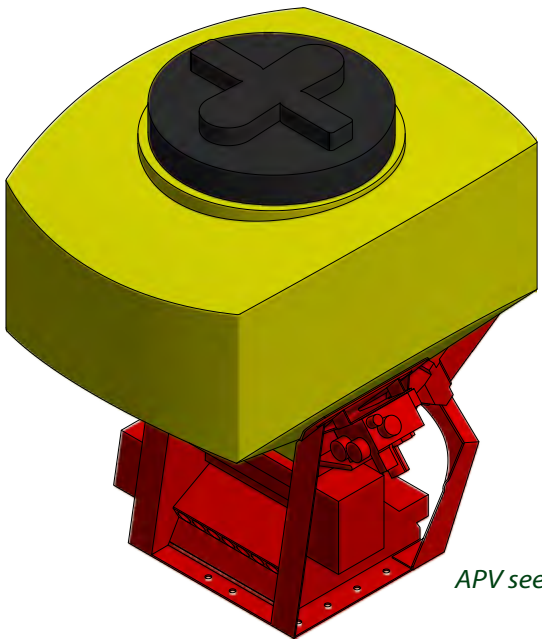


APV seeder




APV 5.2 monitor

2. The second is a **Precision Planting System** that uses the reliable **Kverneland Accord** equipment. This allows precise single seed placement for each unit where a high level of seed singularity is required. By changing the seed disc, different size seeds can be easily planted and also with specialised seed discs more than one seed can be placed per punch hole. Further configurations of this versatile machine are also available. Versions with added Herbicide Application equipment, Fertiliser Placement capability and Drip Tape dispenser gear provide the grower with the ability to use this machine in a wide range of farming systems. Due to the clever design of the main chassis, all of these systems may be added or removed to suit the desired operating conditions and requirements.

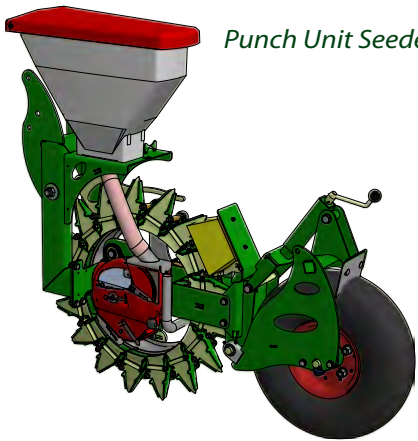


Punch Unit Seeder

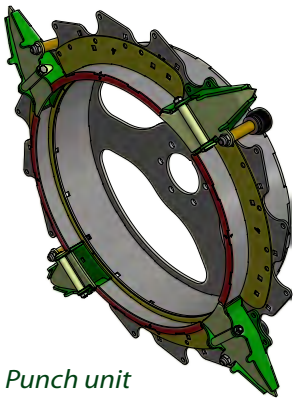

4 Punch unit



17 Punch wheel

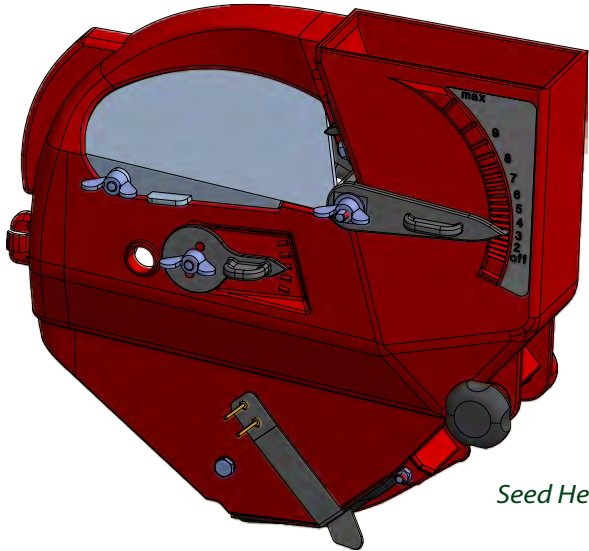

Seed Heart

Precimat monitor





# PM1140

Working width: 1.6 meters  
Weight: 850 kilo  
Tractor HP: >80  
Seed width rows: < 35cm


**Options:**  
Micro granular fertilizer




# PM2140

Working width: 1.6 meters  
Weight: 950 kilo  
Tractor HP: >80  
Seed width rows: < 35cm

**Options:**  
Micro Granular fertilizer

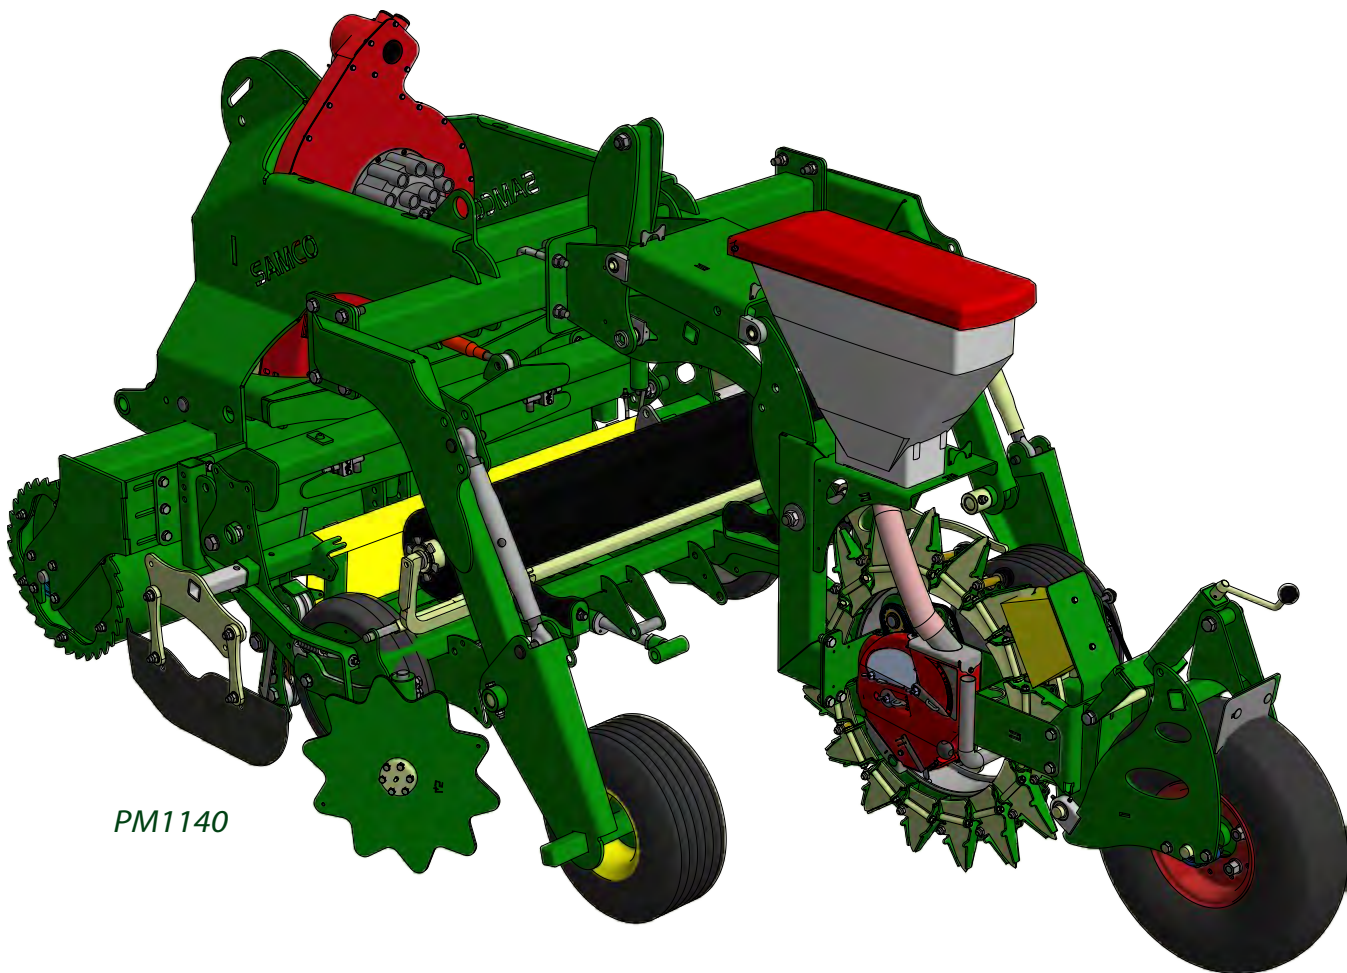

PM1140

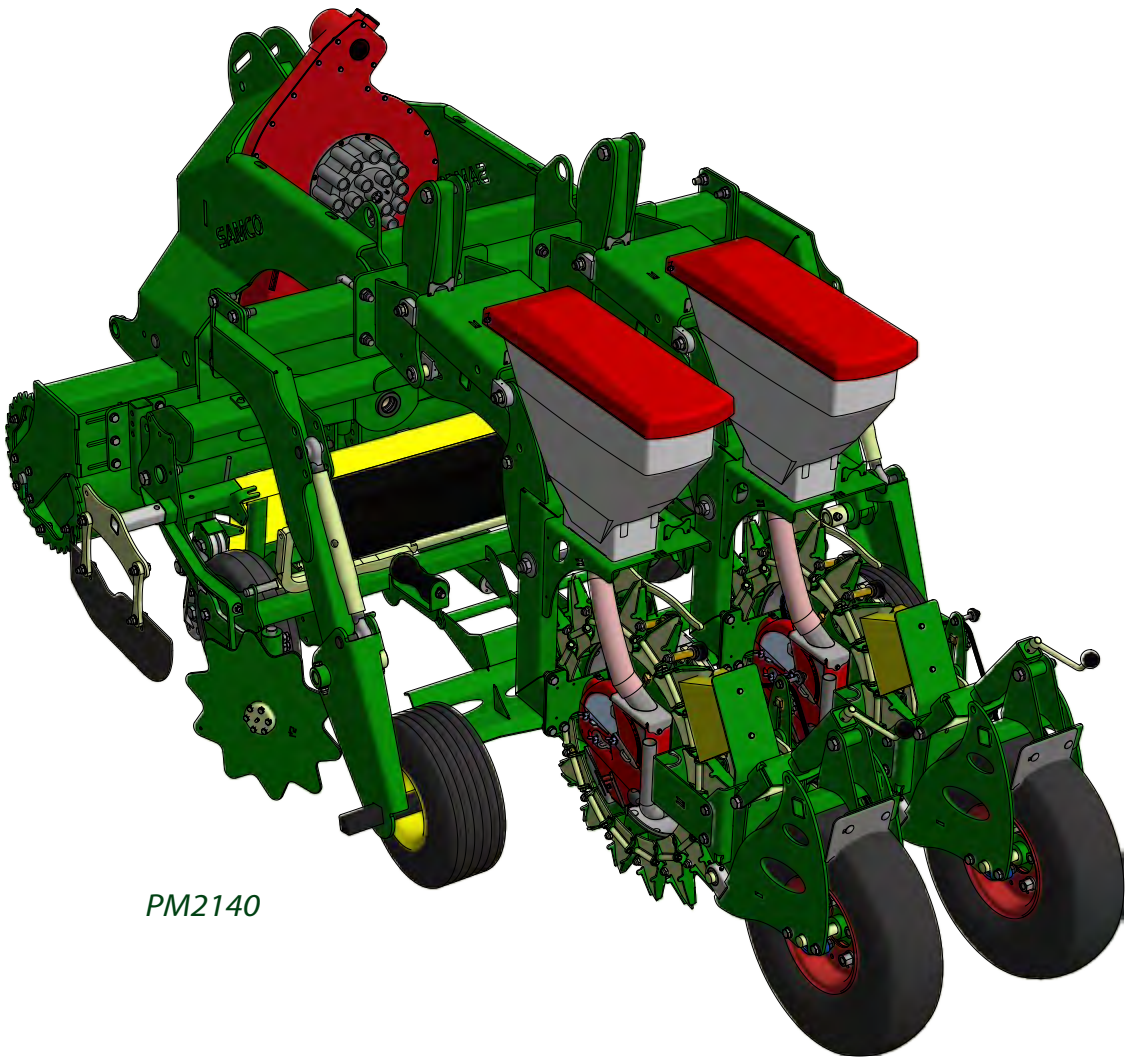


PM2140



# PM4140

Working width: 3.2 meters  
Weight: 2,600 kilo  
Tractor HP: >170  
Seed width rows: < 35cm

**Options:**  
Micro granular fertilizer

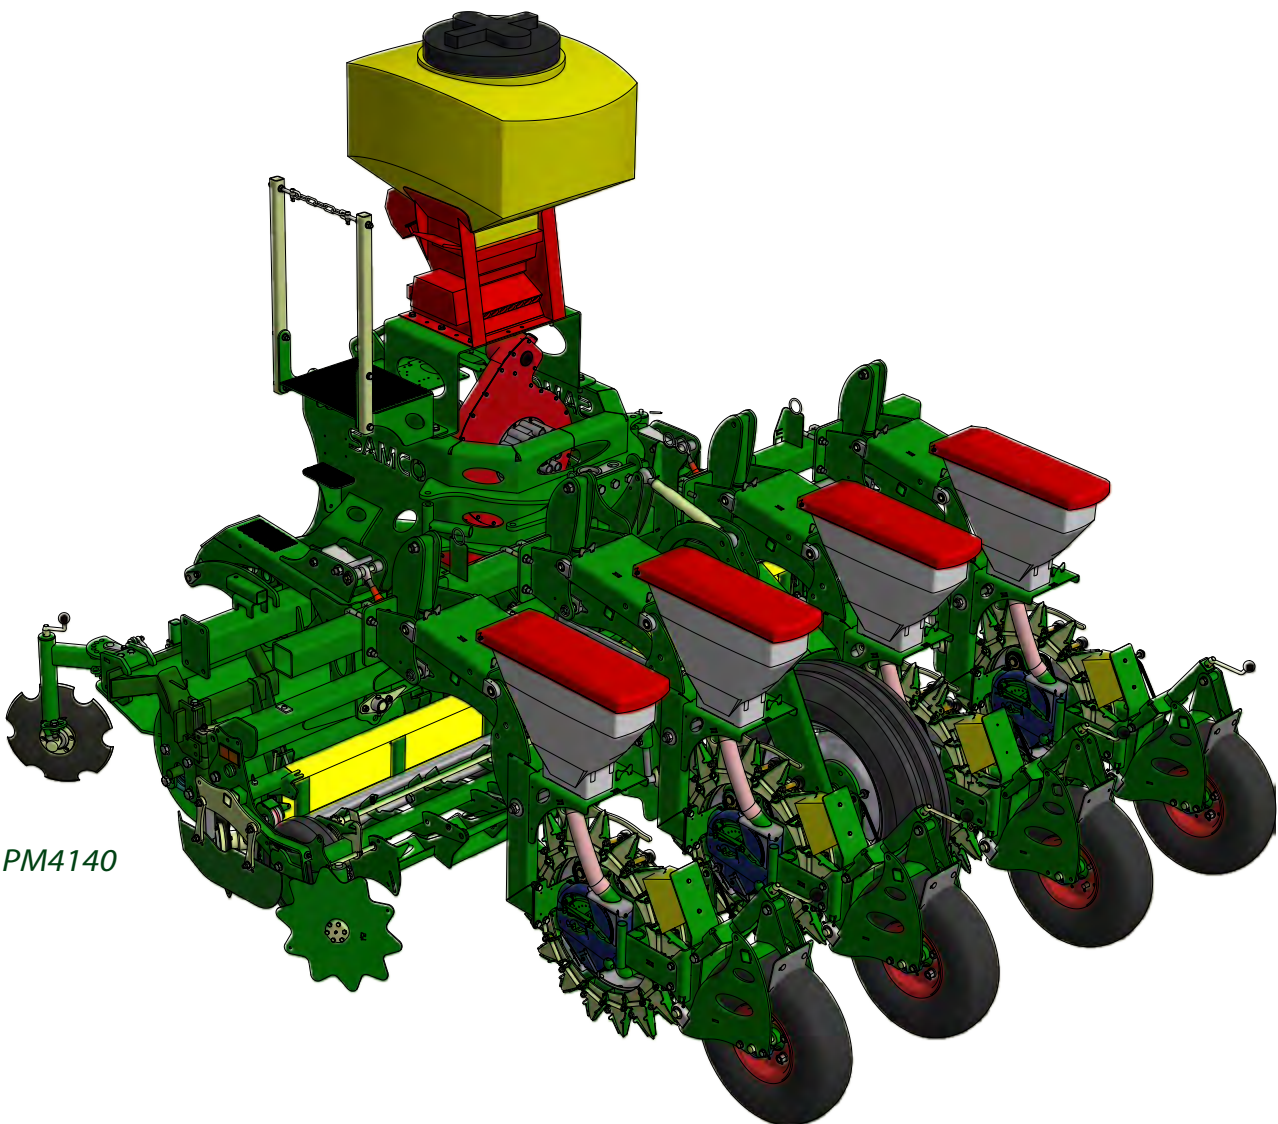


PM4140

# PM8220

Working width: 2.4 meters  
Weight: 2,600 kilo  
Tractor HP: >170  
Seed width rows: < 35cm

**Options:**  
Micro Granular fertilizer

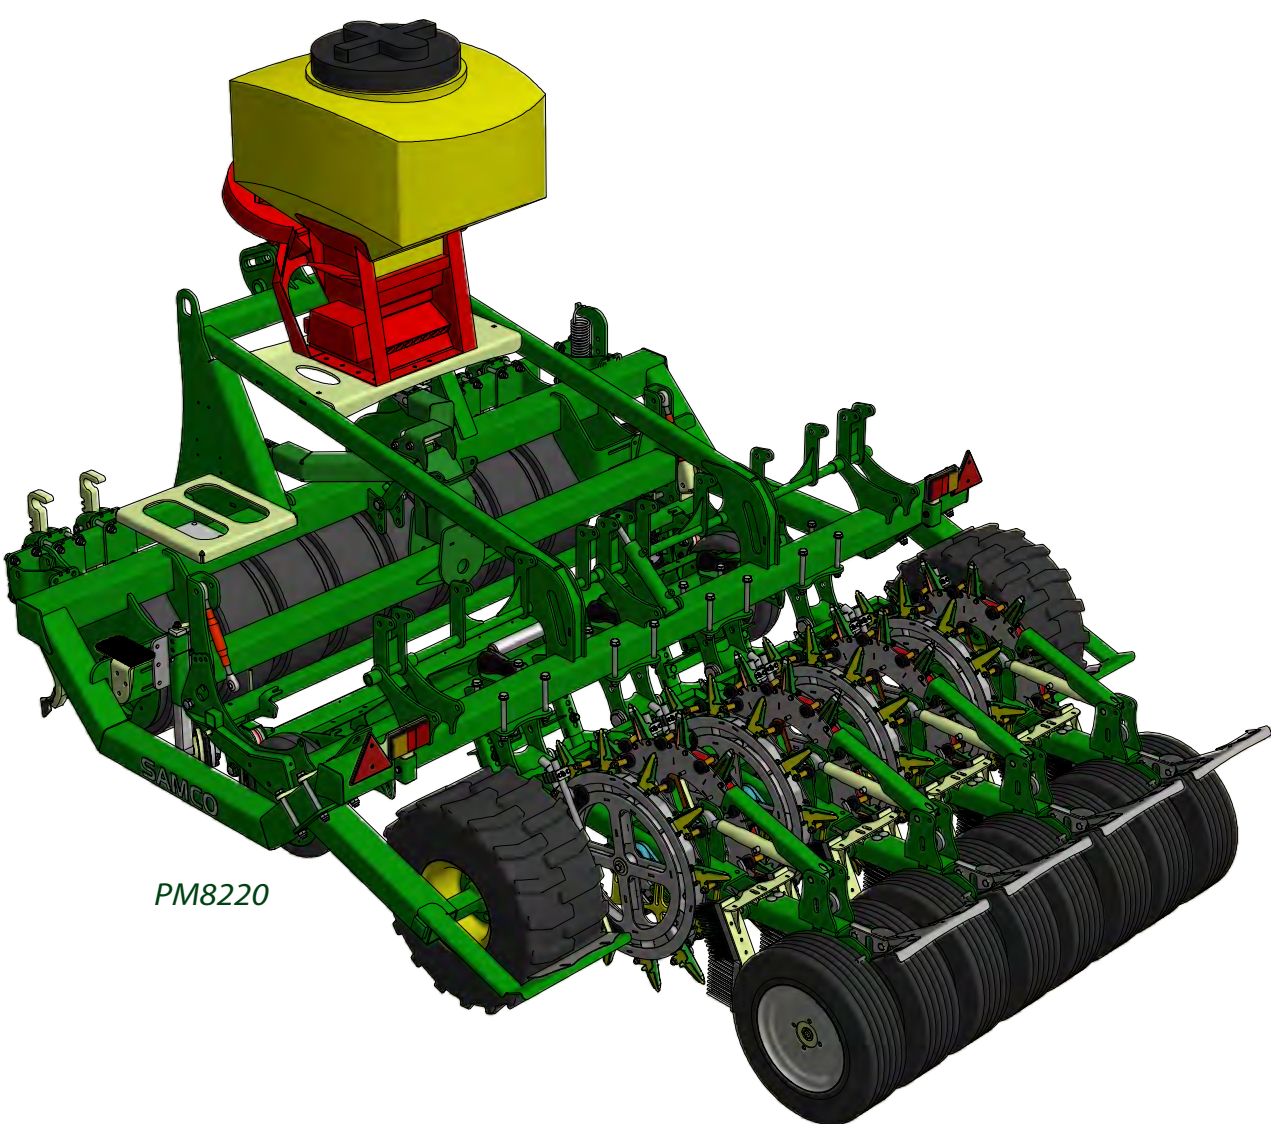

PM8220



**SAMCO AGRICULTURAL MANUFACTURING LTD**

Adare, Co. Limerick, Ireland.

Tel: +353 61 396 176

[www.samco.ie](http://www.samco.ie)